



Monona County Secondary Roads Department
Driveway Permit Requirements

Driveway Location/Spacing

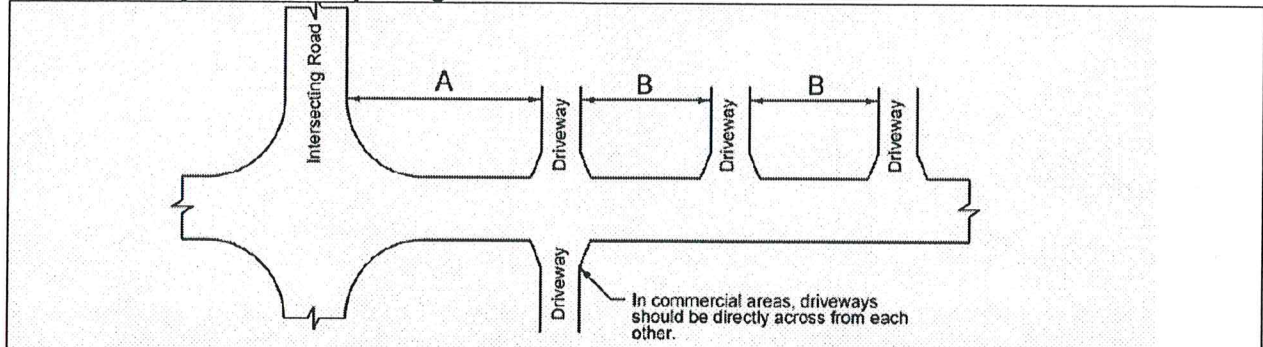

	Minor Arterial			Collector			Local		
	Residential Area	Commercial Area	Ag. Area	Residential Area ²	Commercial Area	Ag. Area	Residential Area ²	Commercial Area	Ag. Area
A. Minimum Intersection Clearance¹	145'	170'	300'	100'	100'	300'	75'	75'	150'
B. Minimum Driveway Spacing²	100'	200'	300'	75'	100'	300'	50'	100'	150'

1. Values are measured from the back of the curb, intersecting road to the adjacent driveway near edge.
2. Values are measured between driveway edges.
3. One access drive allowed per lot. Depending on lot size, an additional drive may be allowed upon approval of the Jurisdiction.

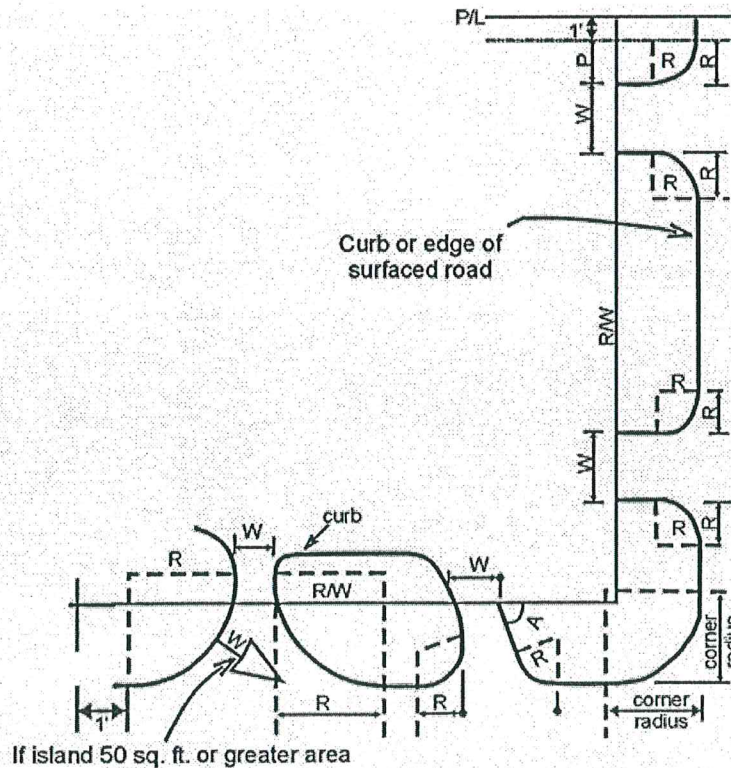

Entrance Type ¹	Dimension Reference (See Section 5I-2, Figure 14)	Major/Principal Arterial Street				Minor/Arterial Street			
		Residential	Commercial	Industrial	Agricultural	Residential	Commercial	Industrial	Agricultural
		C	B	B	C	C	B	B	C
(a) Width	W								
Minimum		15	24	24	20	15	24	24	20
Maximum		30	45	45	30	30	45	45	30
(b) Right-turn Radius ²	R								
Minimum		10	10	25	25	10	10	25	25
Maximum		25	35	50	35	25	35	50	35
(c) Min. Acute Angle ⁴	A	60°	70°	70°	70°	60°	70°	70°	70°
Preferred Acute Angle		90°	90°	90°	90°	90°	90°	90°	90°
(d) Min. Pavement Thickness	T	6 in / 8 in	7 in / 9 in	*	6 in (If paved)	6 in	7 in	*	6 in (If paved)

1. Type "A" entrance requires special study.
 2. 3 ft Flares (F) may be used for residential & agricultural entrances.
 3. Minimum spacing from corner on resident property that access to a minor arterial street may be adjusted if lot frontage is limited. Larger lots with larger frontage may be required on corner lots.
 4. Any variation from 90° will be evaluated on a case by case basis. The minimum acute angle (measured from the edge of the pavement) is 60°.
- * Requires special design.

Entrance Type ¹	Dimension Reference (See Section 5I-2, Figure 14)	Collector (Major & Minor)				Local Street			
		Residential	Commercial	Industrial	Agricultural	Residential	Commercial	Industrial	Agricultural
		C	B	B	C	C	B	B	C
(a) Width	W								
Minimum		10	24	24	20	10	24	24	20
Maximum		24	40	45	30	24	32	40	30
(b) Right-turn Radius ²	R								
Minimum		10	10	25	25	10	10	10	20
Maximum		25	35	50	35	15	20	30	35
(c) Min. Acute Angle ⁴	A	60°	70°	70°	70°	60°	70°	70°	70°
Preferred Acute Angle		90°	90°	90°	90°	90°	90°	90°	90°
(d) Min. Pavement Thickness	T	6 in	7 in	*	6 in (If paved)	6 in	7 in	*	6 in (If paved)

1. Type "A" entrance requires special study.
 2. 3 ft flares (F) may be used for residential & agricultural entrances.
 3. Any variation from 90° will be evaluated on a case by case basis. The minimum acute angle (measured from the edge of the pavement) is 60°.
- * Requires special design